



## BOSS<sup>®</sup> 333 Polyurethane Expanding Foam

### TYPICAL PROPERTIES

ASTM D-1622

Density ..... 1.25 lbs./ft<sup>3</sup>

IN HOUSE METHOD

Yield/24 Oz. Can ..... 11 gallons freely foamed

ASTM C-518

Thermal Conductivity ..... 0.22 - 0.26 Btu-in/hr-F-ft<sup>2</sup>

ASTM C-518

R Value ..... 3.8 - 4.5 hr-F-ft<sup>2</sup>/Btu

Tack Free (1" bead) ..... 10 minutes (73°F & 50% RH)

Can Be Cut (1" bead) ..... 90 minutes (73°F & 50% RH)

Fully Cured (1" bead) ..... 24 hours (73°F & 50% RH)

ASTM E-84-04 UL 723

Fire Testing ..... Flame Spread-15, Smoke Developed-15

DIN 53429

Water Absorption ..... 1%

IN HOUSE TESTING

Temperature Resistance ..... 40°F up to 194°F (long term)  
40°F up to 266°F (short term)

\*Information on this data sheet is subject to change without notice and should not be used for writing specifications. For additional information on specific applications, contact Accumetric, LLC



### USES


- Air sealing
- Partition walls with ceilings
- Through penetrations around cables and pipes
- Seams between chimneys, roof protection, roof panels and wall panels

### FEATURES

- Meets CA-25-4
- UL Classified, Tested to ASTM E-84-04
- Triple Expanding
- Weatherproofs against wind and moisture
- Fills gaps, cracks and holes
- Seals out insects and pests
- Can be sanded, painted and stained
- Complies with EPA Method 24 and California Air Resource Board Method 310

### DESCRIPTION

BOSS<sup>®</sup> 333 is a ready-to-use, multi-purpose, polyurethane foam that expands to three times its original volume on contact with air. The expanding action fills holes, cracks and gaps more completely than standard caulks. BOSS<sup>®</sup> 333 has excellent insulating properties and superb adhesion to virtually all building materials.

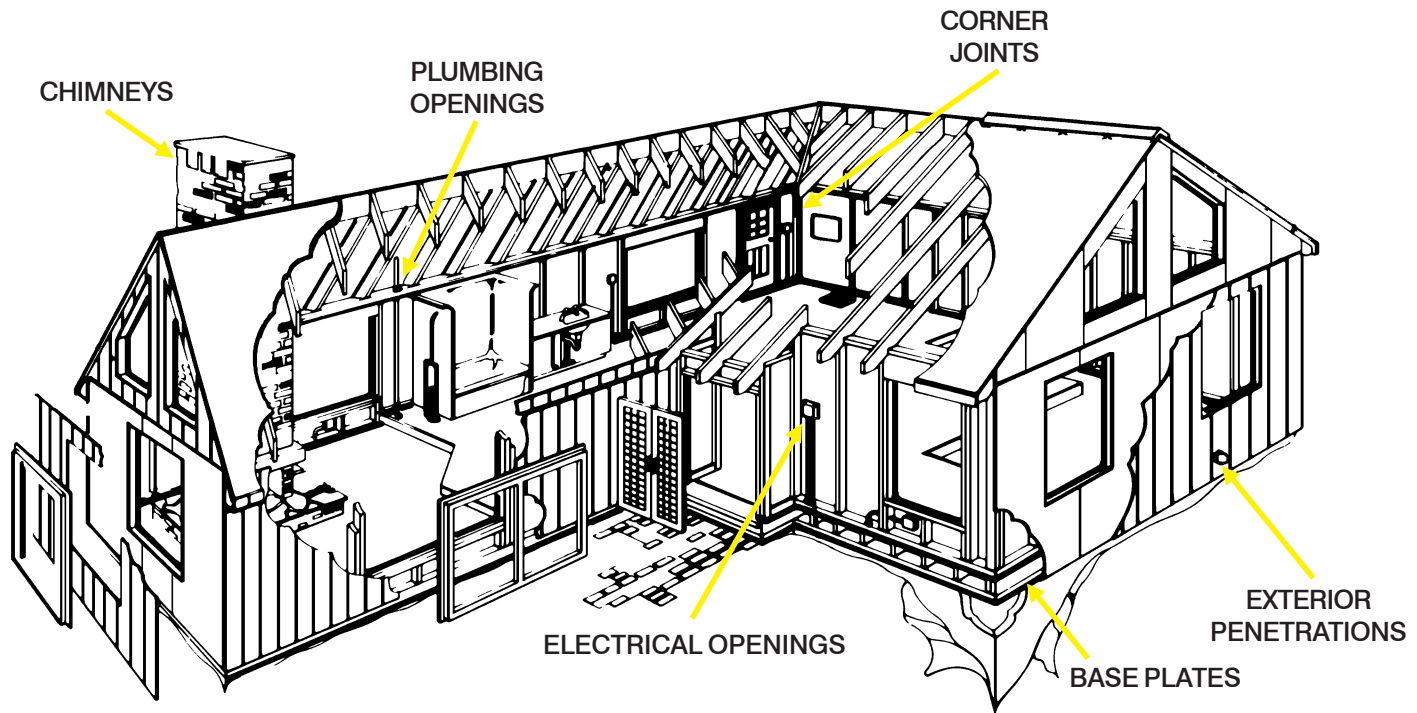

## DANGER!

**EXTREMELY FLAMMABLE. CONTENTS UNDER PRESSURE.** Turn off all pilot lights, electrical igniters, burners and other sources of ignition or heat during use. Do not smoke, use matches or lighters while dispensing foam. Do not expose to direct sunlight, high heat or store in enclosed vehicle. Avoid breathing vapor/spray. Use in adequately ventilated areas with appropriate breathing apparatus. Avoid contact with skin and eyes. Wearing eyewear and gloves is recommended. Do not incinerate or puncture can. Store at temperatures below 120°F.

**EYE IRRITANT. May irritate or cause allergic reaction to skin. Inhalation of vapor may result in respiratory allergies including asthma.** Persons with known isocyanate allergies should avoid any skin or respiratory contact with product ingredients. Use with adequate ventilation or suitable respiratory protective equipment. Wear protective clothing to avoid skin contact. Wear eye protection.

**FIRST AID: Inhalation** - move immediately to fresh air. **Eye contact** - flush eyes immediately for 15 minutes. **Skin contact** - wash affected area immediately with plenty of soap and water. Get medical assistance in all cases (show label when possible). For further health and safety information consult the current Material Safety Data Sheet available from **BOSS® Products** at 800-928-2677.

**KEEP OUT OF REACH OF CHILDREN.**

**CONTAINS:** Diphenylmethanediisocyanate, Polyol and Butane/Propane.

## SPECIFICATIONS

**BOSS® 333** Polyurethane Expanding Foam meets CA-25-4, complies with EPA Method 24 and California Air Resource Board Method 310 and is UL Classified.

## PACKAGING

**BOSS® 333** Polyurethane Expanding Foam is available in 12 oz. and 24 oz. cans.

## STORAGE AND SHELF LIFE

When stored upright in a dry environment at 70°F, **BOSS® 333** has a shelf life of 18 months from date of shipment. Excessive heat can shorten the life of the foam. Containers should be stored in an upright vertical position. Ensure stock is rotated at all times.

## SHIPPING LIMITATIONS

Ground shipments only. Cannot ship by air.

## USERS PLEASE READ

The information and data contained herein is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of use. Since the supplier cannot know all the uses, or the conditions of use to which these products may be exposed, no warranties concerning the fitness or suitability for a particular use or purpose are made.

It is the user's responsibility to thoroughly test any proposed use of our products and independently conclude satisfactory performance in the application.

Likewise, if the application, product specifications or manner in which our products are used requires government approval or clearance, it is the sole responsibility of the user to obtain sure authorization.

The supplier warrants only that its products will meet its specifications. There is no warranty of merchantability or fitness for use, nor any other express or implied warranty. The user's exclusive remedy and the supplier's sole liability is limited to refund of the purchase price or replacement of any product shown to be otherwise than as warranted. The supplier will not be liable for incidental or consequential damages of any kind.

Suggestions of uses should not be taken as inducements to infringe any patents.

MADE IN U.S.A.

## BOSS® PRODUCTS

**Accumetric, LLC**  
350 Ring Road  
Elizabethtown,  
Kentucky 42701 USA  
800-928-BOSS(2677)  
TEL (270)769-3385  
FAX (270)765-2412  
Outside U.S.  
TEL +1(270)769-3385  
FAX +1(270)765-2412

**Accumetric Asia Pacific, LTD**  
18 Kitpanit Bldg. 5th Floor  
#502 Patpong Road  
Suriyawong, Bangrak  
Bangkok, 10500 Thailand  
TEL (662)634-3060  
FAX (662)634-3066

[www.bossproducts.com](http://www.bossproducts.com)