

### AUTO SEAM SEALANT PART NO. 49388

#### TYPICAL PROPERTIES

Physical State .....	Paste
Color/Appearance .....	White or light tan
Odor .....	Solvent odor
Specific Gravity .....	1.29
Boiling/Cond. Point.....	282° F
Density lbs/Gal. ....	10.7513843
Evaporation Rate ....	Faster than n-butyl acetate
Vapor Density .....	Heavier than air
Solubility .....	Not soluble in water
VOC .....	2.65 lbs per gallon/317 grams per liter

#### DESCRIPTION

*Dynatex® Auto Seam Sealant* is a fast setting, rubber based sealer that has excellent flexibility and tremendous adhesion. *Dynatex® Auto Seam Sealant* has a self-smoothing effect so there is no tooling solvent required. Any fingerprints or sharp edges will completely disappear within 5 minutes, after tooling. This product should not be primed unless sealer is completely cured. Any type paint may be applied after 30 minutes.


#### FEATURES

- Won't crack or peel and always stays flexible
- Skins over in about 1-2 minutes
- Tools out better than competitive brands

#### TYPICAL APPLICATIONS

*Dynatex® Auto Seam Sealant* can be used anywhere there is metal to metal contact:

- Door skins
- Trunk seams
- Cowl seams
- Floor seams
- Drip rails

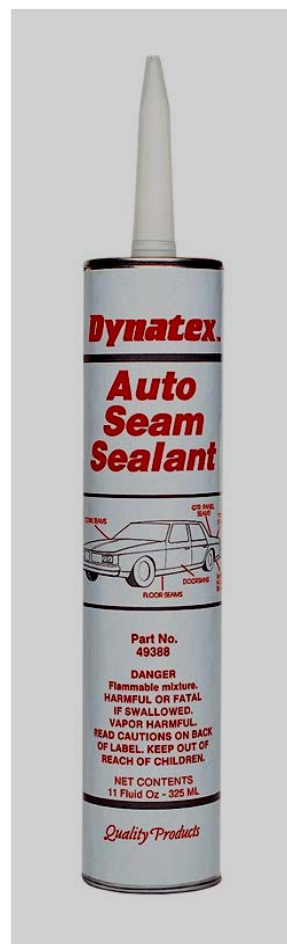

#### HOW TO USE

1. Apply bead of sealer to area being worked.
2. Smooth out with putty stick or finger and featheredge with Acry-lac.
3. Any type of paint can be applied after 30 minutes.

## STORAGE AND SHELF LIFE

When stored in the original unopened containers at or below 90°F (32°C), *Dynatex® Auto Seam Sealant* has a shelf life of 12 months from date of shipment.

In Countries where high heat and humidity are a factor, special precautions must be taken. Store product in a covered, well-ventilated warehouse and avoid excessive heat conditions. Storage in high heat, high humidity conditions may reduce shelf life by up to 30%. Rotation of stock is an absolute necessity. Cartons should always be stacked upright with the nozzle tip pointed upwards. DO NOT stack cartons on their side. **NEVER** stack cartons more than 8 high. DO NOT store within 1 meter (4 feet) of roofline of the warehouse or storage building.

## TRANSPORTATION INFORMATION

### DOT Road Shipment Information

Not subject to DOT

### Air Shipment (IATA)

Not subject to IATA regulations.

### Ocean Shipment (IMDG)

Not subject to IMDG code.

## USERS PLEASE READ

The information and data contained herein is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of use. Since the supplier cannot know all the uses, or the conditions of use to which these products may be exposed, no warranties concerning the fitness or suitability for a particular use or purpose are made.

It is the user's responsibility to thoroughly test any proposed use of our products and independently conclude satisfactory performance in the application.

Likewise, if the application, product specifications or manner in which our products are used requires government approval or clearance, it is the sole responsibility of the user to obtain sure authorization.

**Non-warranty:** Because the storage, handling and application of the material is beyond Dynatex control, we can accept no liability for the results obtained. Dynatex sole limited warranty is the product meets the manufacturing specifications in effect at time of shipment. There is no warranty of merchantability or fitness for use, nor any other express or implied warranty. Dynatex will not be liable for incidental or consequential damages of any kind. The exclusive remedy for breach of such limited warranty is a refund of purchase price or replacement of any product shown to be other than as warranted.

Suggestions of uses should not be taken as inducements to infringe any patents.

**Dynatex®** A division of Soudal Accumetric

#### Dynatex

350 Ring Road  
Elizabethtown  
Kentucky 42701 USA  
(800) 999-2937  
TEL (270) 769-5557  
FAX (270) 769-6418

#### Outside U.S.

TEL +1(270) 769-5557  
FAX +1(270) 769-6418

#### Accumetric Asia Pacific, LTD

18 Kitpanit Bldg. 5<sup>th</sup> Floor  
#502 Patpong Road  
Suriyawong, Bangrak  
Bangkok, 10500 Thailand  
TEL (662) 634-3060  
FAX (662) 634-3066

Email: [sales@dynatexinc.com](mailto:sales@dynatexinc.com)  
Website: [www.dynatexinc.com](http://www.dynatexinc.com)