

### ENGINE DEGREASER PART NO. 52165

#### PHYSICAL PROPERTIES

Physical State .....	Aerosol
Specific Gravity .....	0.77
Flash Point .....	156°F
Solubility .....	Nil in water
Evaporation Rate .....	Slower than ether
Vapor Density .....	Heavier than air
NFPA Flammability Rating .....	4*

\*Highly Flammable

#### DESCRIPTION


*Dynatex® Non-Foaming Engine Degreaser* contains a powerful blend of degreasing solvents. Penetrating formula produces quick, satisfying results. Ideal for dissolving grease, oil and dirt deposits on engines of all types. Can also be used on driveways and garage floors. Cleans off easily. Restores bright appearance to engines, machinery, etc.

#### FEATURES

- Quickly dissolves grease, oil and dirt
- Cleans iron, steel, aluminum
- Rinses off easily with water
- Tested in accordance to 75/324/EEC Directive 6.1

#### TYPICAL APPLICATIONS

- Cleaning and degreasing automobile engines
- Industrial equipment
- Tools
- Garage floors
- Lawn mowers
- Farm Equipment
- Driveways

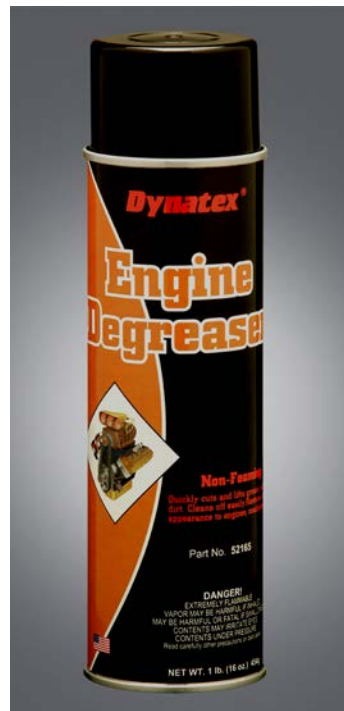

#### DIRECTIONS FOR USE:

1. Provide adequate ventilation.
2. For proper spraying, can should be near room temperature.
3. Warm up engine for easier cleaning and turn off. Remove air filter. Wrap plastic securely around (or remove) any items which may be sensitive to solvents and water, and which are not already sealed (such as the air intake system, alarm siren, electronic controls, electrical components, distributor and carburetor).
4. Use a scraper and/or brush to remove any thick or hard buildups of dirt, grease or grime.
5. Hold can upright, spray product generously on the dry engine. Wait about 5 to 10 minutes while product penetrates and emulsifies the dirty coating, then flush off surface with a very strong stream of water.
6. Repeat procedure if necessary.
7. All surfaces to dry thoroughly, and then remove plastic, replace any parts that were removed and start engine.

## GENERAL INFORMATION

This product is not recommended for use in pure oxygen environments and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet.

## STORAGE AND SHELF LIFE

*Dynatex® Non-Foaming Engine Degreaser* should ideally be stored in a cool, dry location in unopened containers at a temperature between 46°F (8°C) to 82°F (28°C) unless otherwise labeled. DO NOT store within 1 meter (4 feet) of roofline of the warehouse of storage building. Store in accordance with NFPA 30B for level 3 aerosol. *Dynatex® Non-Foaming Engine Degreaser* has a shelf life of 18 months from date of shipment

Contents under pressure. Do not smoke while using or use near open flame. Container may explode if heated in any manner. Protect from sunlight and do not expose to temperatures exceeding 122°F (50°C). Do not pierce or burn container, even after use. Do not spray on a naked flame and any incandescent material. **DO NOT SMOKE WHILE USING THIS PRODUCT.**

## USERS PLEASE READ

The information and data contained herein is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of use. Since the supplier cannot know all the uses, or the conditions of use to which these products may be exposed, no warranties concerning the fitness or suitability for a particular use or purpose are made.

It is the user's responsibility to thoroughly test any proposed use of our products and independently conclude satisfactory performance in the application.

Likewise, if the application, product specifications or manner in which our products are used requires government approval or clearance, it is the sole responsibility of the user to obtain sure authorization.

**Non-warranty:** Because the storage, handling and application of the material is beyond Dynatex control, we can accept no liability for the results obtained. Dynatex sole limited warranty is the product meets the manufacturing specifications in effect at time of shipment. There is no warranty of merchantability or fitness for use, nor any other express or implied warranty. Dynatex will not be liable for incidental or consequential damages of any kind. The exclusive remedy for breach of such limited warranty is a refund of purchase price or replacement of any product shown to be other than as warranted.

Suggestions of uses should not be taken as inducements to infringe any patents.

**Dynatex®** A division of Soudal Accumetric

**Dynatex**  
350 Ring Road  
Elizabethtown  
Kentucky 42701 USA  
(800) 999-2937  
TEL (270) 769-5557  
FAX (270) 769-6418  
*Outside U.S.*  
TEL +1(270) 769-5557  
FAX +1(270) 769-6418

**Accumetric Asia Pacific, LTD**  
18 Kitpanit Bldg. 5<sup>th</sup> Floor  
#502 Patpong Road  
Suriyawong, Bangrak  
Bangkok, 10500 Thailand  
TEL (662) 634-3060  
FAX (662) 634-3066

Email: [sales@dynatexinc.com](mailto:sales@dynatexinc.com)  
Website: [www.dynatexinc.com](http://www.dynatexinc.com)